


## Series 2150 Heavy-Duty Contractors Wire Braid Air Hose

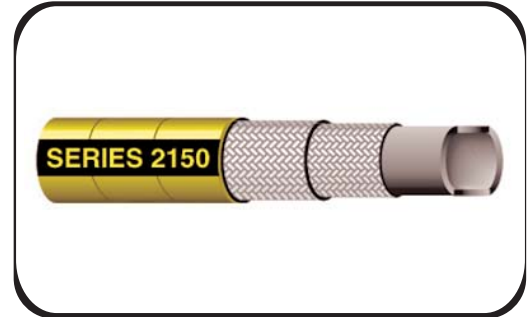

This hose is designed for the most severe service in mines, quarries, and heavy construction. The **braided** construction offers superior flexing without kinking and is excellent for compressor air application.

<b>Tube:</b>	Black Nitrile (ARPM Class A ORS)
<b>Reinforcement:</b>	One or multiple wire braids
<b>Cover:</b>	Yellow Nitrile/PVC Blend (ARPM Class A ORS)
<b>Temperature:</b>	-20°F to +212°F (-29°C to +100°C)
<b>Branding:</b>	Black Mylar / Yellow letters

Part #	I.D. (In)	O.D. (In)	W.P. (PSI)	Weight (Lbs / Ft)	Std. Length	Stock (Yes or Min. Order)
2150-050	1/2	.89	1000	.37	100'	Yes
2150-075	3/4	1.14	1000	.57	100'	Yes
2150-100	1	1.42	800	.73	100'	Yes
2150-125	1-1/4	1.69	800	1.05	100'	Yes
2150-150	1-1/2	1.97	800	1.30	50'/100'	Yes
2150-200	2	2.52	600	1.60	50'/100'	Yes
2150-250	2-1/2	3.07	500	2.00	50'/100'	400'
2150-300	3	3.62	500	3.00	50'/100'	Yes